



How much is left in your “sleep tank”? Proof of concept for a simple model for sleep history feedback



Jillian Dorrian^{a,*}, Steven Hursh^b, Lauren Waggoner^b, Crystal Grant^a, Maja Pajcin^a, Charlotte Gupta^a, Alison Coates^a, David Kennaway^c, Gary Wittert^d, Leonie Heilbronn^d, Chris Della Vedova^a, Siobhan Banks^a

^a University of South Australia, GPO Box 2471, Adelaide, South Australia 5001, Australia

^b Institutes for Behavior Resources Inc, 2104 Maryland Avenue, Baltimore, MD 21218, USA

^c Robinson Research Institute and Adelaide School of Medicine, University of Adelaide, GPO Box 498, Adelaide, South Australia 5005, Australia

^d University of Adelaide, University of Adelaide, GPO Box 498, Adelaide, South Australia 5005, Australia

ARTICLE INFO

Keywords:

Sleep
Shiftwork
Actigraphy
Modelling
Fitness for work

ABSTRACT

Technology-supported methods for sleep recording are becoming increasingly affordable. Sleep history feedback may help with fatigue-related decision making – Should I drive? Am I fit for work? This study examines a “sleep tank” model (SleepTank™), which is analogous to the fuel tank in a car, refilled by sleep, and depleted during wake. Required inputs are sleep period time and sleep efficiency (provided by many consumer-grade actigraphs). Outputs include suggested hours remaining to “get sleep” and percentage remaining in tank (Tank%). Initial proof of concept analyses were conducted using data from a laboratory-based simulated nightshift study. Ten, healthy males (18–35y) undertook an 8h baseline sleep opportunity and daytime performance testing (BL), followed by four simulated nightshifts (2000 h–0600 h), with daytime sleep opportunities (1000 h–1600 h), then an 8 h night-time sleep opportunity to return to daytime schedule (RTDS), followed by daytime performance testing. Psychomotor Vigilance Task (PVT) and Karolinska Sleepiness Scale were performed at 1200 h on BL and RTDS, and at 1830 h, 2130 h 0000 h and 0400 h each nightshift. A 40-minute York Driving Simulation was performed at 1730 h, 2030 h and 0300 h on each nightshift. Model outputs were calculated using sleep period timing and sleep efficiency (from polysomnography) for each participant. Tank% was a significant predictor of PVT lapses ($p < 0.001$), and KSS ($p < 0.001$), such that every 5% reduction resulted in an increase of two lapses, or one point on the KSS. Tank% was also a significant predictor of %time in the Safe Zone from the driving simulator ($p = 0.001$), such that every 1% increase in the tank resulted in a 0.75% increase in time spent in the Safe Zone. Initial examination of the correspondence between model predictions and performance and sleepiness measures indicated relatively good predictive value. Results provide tentative evidence that this “sleep tank” model may be an informative tool to aid in individual decision-making based on sleep history.

1. Introduction

Sleep loss results in increased likelihood of error and accident, in the workplace and on the roads (Rajaratnam and Arendt, 2001; Rogers et al., 2004; Dorrian et al., 2008). In Australia, in any workplace covered by the Work Health and Safety Act (SafeWorkAustralia, 2011), fatigue management is a reciprocal responsibility for employers and employees, whereby the employers have a duty of care to provide a safe

workplace, and the employees have a responsibility to be fit for work. Decisions about whether an employee is safe to start or to continue work are frequently self-reported, and in some circumstances (e.g. truck cab, driver-only train cab) solo operators may only have their own insight to rely on (Dorrian et al., 2003). This leads us to consider the information that people use to make decisions about whether they are sufficiently fit to start, or to continue work.

Sleepiness is often used as an indicator of fatigue-related

* Corresponding author at: Behaviour-Brain-Body Research Centre, School of Psychology, Social Work and Social Policy, Division of Education, Arts and Social Sciences, University of South Australia, GPO Box 2471, Adelaide, South Australia, Australia.

E-mail addresses: jill.dorrian@unisa.edu.au (J. Dorrian), shursh@ibrinc.org (S. Hursh), lwaggoner@ibrinc.org (L. Waggoner), crystal.grant@mymail.unisa.edu.au (C. Grant), maja.pajcin@mymail.unisa.edu.au (M. Pajcin), charlotte.gupta@mymail.unisa.edu.au (C. Gupta), alison.coates@unisa.edu.au (A. Coates), david.kennaway@adelaide.edu.au (D. Kennaway), gary.wittert@adelaide.edu.au (G. Wittert), leonie.heilbronn@adelaide.edu.au (L. Heilbronn), Chris.DellaVedova@unisa.edu.au (C.D. Vedova), siobhan.banks@unisa.edu.au (S. Banks).

<https://doi.org/10.1016/j.aap.2018.01.007>

Received 31 July 2017; Received in revised form 9 January 2018; Accepted 9 January 2018
Available online 07 May 2018

0001-4575/ © 2018 Elsevier Ltd. All rights reserved.

impairment, and in many circumstances, it tracks performance measures (Kaida et al., 2006). However, this is not always the case (Van Dongen et al., 2003). Further, measuring sleepiness is not necessarily measuring awareness of risk. Performance ratings often track sleepiness more closely than they track performance (Dorrian et al., 2000, 2003, 2007). Given these inconsistencies, an alternative to solely relying on self-assessment could involve integration of technology-supported methods for sleep recording. Indeed, consumer-grade sleep technologies (CST) are becoming increasingly affordable (Ko et al., 2015) and may provide data that permit personal monitoring systems to inform decisions relating to fitness for work. While the proliferation of such devices supports their potential, current barriers to effective use of CST include a lack of validation against research-grade actigraphy and polysomnography, which is the gold-standard for sleep measurement.

Current international best practice in workplace fatigue management involves a Fatigue Risk Management System (FRMS) (Dawson and McCulloch, 2005; Gander et al., 2011; Cabon et al., 2012; Gander et al., 2014), which includes specific policy, education and awareness training, fatigue monitoring systems with feedback, procedures for reporting, investigating and recording fatigue-related incidents and accidents, and evaluation processes and mechanisms for testing the impact of any fatigue-interventions (Gander et al., 2011). In this context, validated CSTs may assist with fatigue monitoring, however, it is critical to consider the form of the feedback. At present, CSTs provide information such as prior sleep duration, timing, and sometimes an indicator of sleep quality or efficiency. In operational settings, a worker needs to be able to use sleep history information to assess what this may mean for their fatigue level when starting work. Further, it is often necessary to project fatigue assessments into the future (e.g. ‘towards the end of my shift, will I still be fit for work, or for the commute?’).

Techniques to transform sleep history to indicate fatigue likelihood are already in use as part of FRMS in a number of industries including, for example, rail (TransportCanada, 2011) and healthcare (SA Ambulance, 2008). These incorporate a simple calculation based on the allocation of ‘fatigue likelihood points’ according to the amount of sleep in the prior 24 and 48 h, and the number of hours that the employee has been awake (Dawson and McCulloch, 2005). The calculation may be performed by the worker (TransportCanada, 2011), or may be automated based on simple inputs (SA Ambulance, 2008), and is followed by a series of actions to take should the employee reach critical thresholds indicating that fatigue, at levels of operational concern, is likely.

More sophisticated approaches for transforming sleep history into estimation of fatigue likelihood (or performance impairment, alertness, or effectiveness) have been published in the biomathematical modelling literature (Dinges, 2004; Hursh et al., 2004; Mallis, Mejdal et al. 2004; Van Dongen et al., 2007; Dawson et al., 2011). Frequently, the input is simply work hours, from which sleep (and then the outcomes) are estimated (Kandelaars et al., 2006). Sleep estimation is primarily based on the two-process model (Borbély, 1982), which includes a circadian oscillator, representing the sinusoidal 24 h rhythm, and a homeostatic function, which increases with wake, and decreases during sleep. These models are used as part of FRMS in industry at an aggregate level to predict fatigue hotspots across rosters, target roster areas for counter-measure application, and to compare potential rosters (Mallis et al., 2017).

A current area of development for biomathematical models is their application in the context of predicting individual fatigue likelihood (Van Dongen et al., 2007; Dorrian et al., 2012). One challenge for individual modelling is the estimation of the circadian component, especially in the context of irregular work hours and/or time zone changes, as are frequent in 24 h industries including aviation. The circadian system adapts slowly to sleep in new time zones, and is influenced strongly by differences in light exposure (Mallis et al., 2017). In contrast, the homeostatic function is relatively simple to model if sleep history is known. Further, since there is a circadian rhythm to sleep

length and quality (Van Dongen and Dinges, 2005), measures of sleep timing, length, and efficiency (as can be estimated from CSTs), to some extent, have an implicit circadian signal. This study examines a model that mathematically transforms sleep history (timing, length, efficiency), using our understanding of homeostatic component only of the two-process model, that could be built-in to CSTs to provide useful feedback to aid in fatigue-related decision-making and forward planning. While the calculations focus on the homeostatic drive, the circadian system is captured, at least in part, through the changes in sleep timing, length, and efficiency (model inputs) that reflect the circadian signal. This ‘sleep tank’ model (SleepTank™¹) (invented by the second author) adjusts the homeostatic component of the two-process model to account for the effects of prolonged sleep restriction (Belenky et al., 2003; Van Dongen et al., 2003; Hursh et al., 2004) and individual differences in sleep requirement. For this study, the sleep tank was calibrated to an average sleep requirement of 8 h of sleep per day.

The aim of this study was to provide an initial proof of concept for this model using data from a controlled laboratory study of simulated shiftwork, using polysomnographic (gold standard) measures of sleep as inputs, and comparing model predictions to measures of sleepiness and performance.

2. Method

This initial validation of the ‘sleep tank’ model (SleepTank™) was conducted using data from a simulated nightshift study. This study was approved by the University of South Australia Human Research Ethics Committee (0000033621) and was conducted in accordance with the Declaration of Helsinki.

2.1. Participants

Ten, healthy males (18–35y) were recruited using flyers and social media. Interested participants underwent screening. Inclusion criteria included good physical (confirmed by a general health questionnaire and fasting blood screen) and mental health (assessed by clinical history and Beck Depression Inventory) (Beck et al., 1996), a score between 22–43 on the Composite Morningness Questionnaire (Horne and Östberg, 1976), and habitual nightly sleep time between 7 and 9 h (confirmed by sleep diaries and wrist actigraphs, Actiwatch 2, Philips Respironics, Bend, OR). Exclusion criteria included reported: (a) sleep disorder (general health questionnaire) or sleep disturbance (> 6 on the Pittsburgh Sleep Quality Index) (Buysse et al., 2003); (b) food allergy/ intolerance; (c) restrained eaters; (d) BMI > 30 kg/m²; (e) use of prescription or over-the-counter medications known to affect glucose metabolism (Grant et al., 2017) or sleep; or (f) engagement in night shift work, trans-meridian travel, smoking, illicit drug use, excessive alcohol consumption (> 2 standard drinks/day) or caffeine consumption (> 2 cups/day) in the three months prior to the study. Participants were instructed to abstain from alcohol and caffeine in the week prior to the study (with compliance checked using a 3-day food diary completed on non-consecutive days).

2.2. Procedure

Participants (in groups of three or four) stayed in the Centre for Sleep Research laboratory at the University of South Australia for 7 days. This period included an 8 h baseline sleep opportunity (2200 h–0600 h) and daytime performance testing (BL), followed by four simulated nightshifts (2000 h–0600 h), with daytime sleep opportunities (1000 h–1600 h), then an 8 h night-time sleep opportunity (2200 h–0600 h) to return to daytime schedule (RTDS), before a final period of daytime performance testing. Given the optimal sleep

¹ SleepTank™ is a trademark of the Institutes for Behavior Resources, Inc.

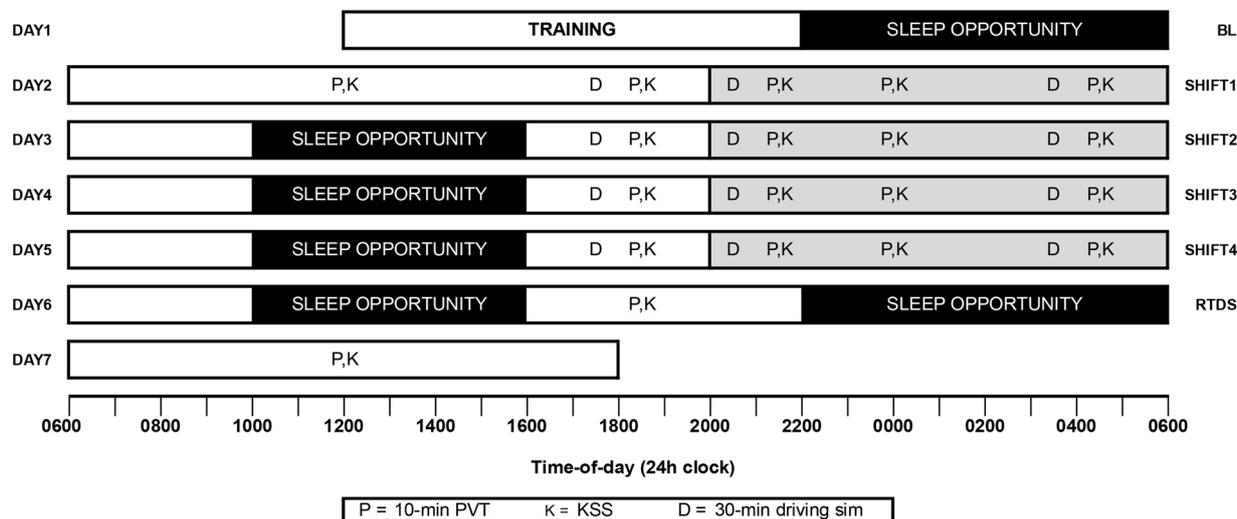


Fig. 1. Protocol Diagram – Time-of-day (24 h clock) is on the x-axis, with day of study on the y-axis. Black bars indicate sleep opportunities and grey bars indicate simulated night shifts. BL = Baseline, Shift1-4 = simulated night shifts, RTDS = return to daytime schedule. PVT = Psychomotor Vigilance Task, KSS = Karolinska Sleepiness Scale.

Table 1

Performance Changes During Simulated Night Work – Mixed effects ANOVA for PVT Lapses, KSS and driving simulator %time in safe zone with fixed effects of shift (1–4), trial (PVT, KSS = 1830 h/ 2130 h /0000 h /0400 h; %safe zone = 1730 h/ 2030 h/ 0300 h) and shift* trial with a random effect of subjectID.

	Shift			Trial			Shift*Trial			Post-hoc <i>p</i> < 0.01
	<i>F</i>	<i>df</i>	<i>p</i>	<i>F</i>	<i>df</i>	<i>p</i>	<i>F</i>	<i>df</i>	<i>p</i>	
PVT	0.09	3,134.0	0.966	23.96	3,134.0	< 0.001	0.25	9,134.0	0.985	1830 h, 2130 h, 0000 h < 0400 h
KSS	6.63	3,134.0	< 0.001	62.02	3,134.0	< 0.001	1.42	9,134.0	0.183	1830 h < 0000 h, 0400 h Shift1 > Shifts2–4
%Safe Zone	2.04	3,99.0	0.113	10.24	2,99	< 0.001	0.87	6,99.0	0.518	1730 h, 2030 h > 0300 h

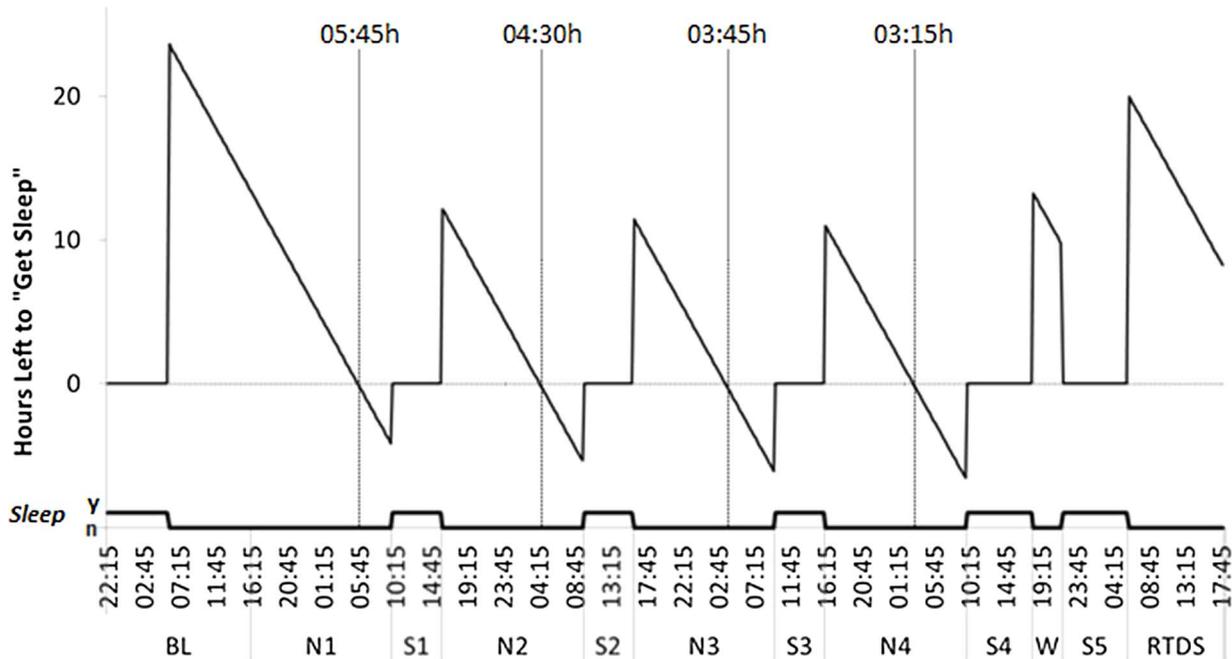


Fig. 2. Model Hours Left to “Get Sleep” Metric – Time-of-day (24h clock) is on the x-axis, hours left to ‘get sleep’ (an estimate of the latest advisable bedtime given what remains in the “sleep tank”) on the y-axis. Sleep opportunities are shown along the x-axis. BL = Baseline, N1-4 = nightshifts, S1-4 = Sleep opportunities, RTDS = return to daytime schedule. Times for *y* = 0 (latest advisable bedtimes) are indicated.

environment in the laboratory, with no social or domestic pressures to wake, daytime sleep periods were limited to 6h in order to more realistically simulate sleep patterns of nightshift workers, who typically experience daytime sleep that is shortened by 2–4 h (Åkerstedt, 1995; 2003). Psychomotor Vigilance Task (PVT) and Karolinska Sleepiness

Scale (KSS) were performed at 1200 h on BL and RTDS, and at 1830 h, 2130 h, 0000 h, and 0400 h each simulated nightshift. A 40-minute York Driving Simulation was performed at 1730 h, 2030 h and 0300 h on each simulated nightshift (Fig. 1). On BL, Day4 and RTDS, sleep was monitored using polysomnography. Polysomnography was used to

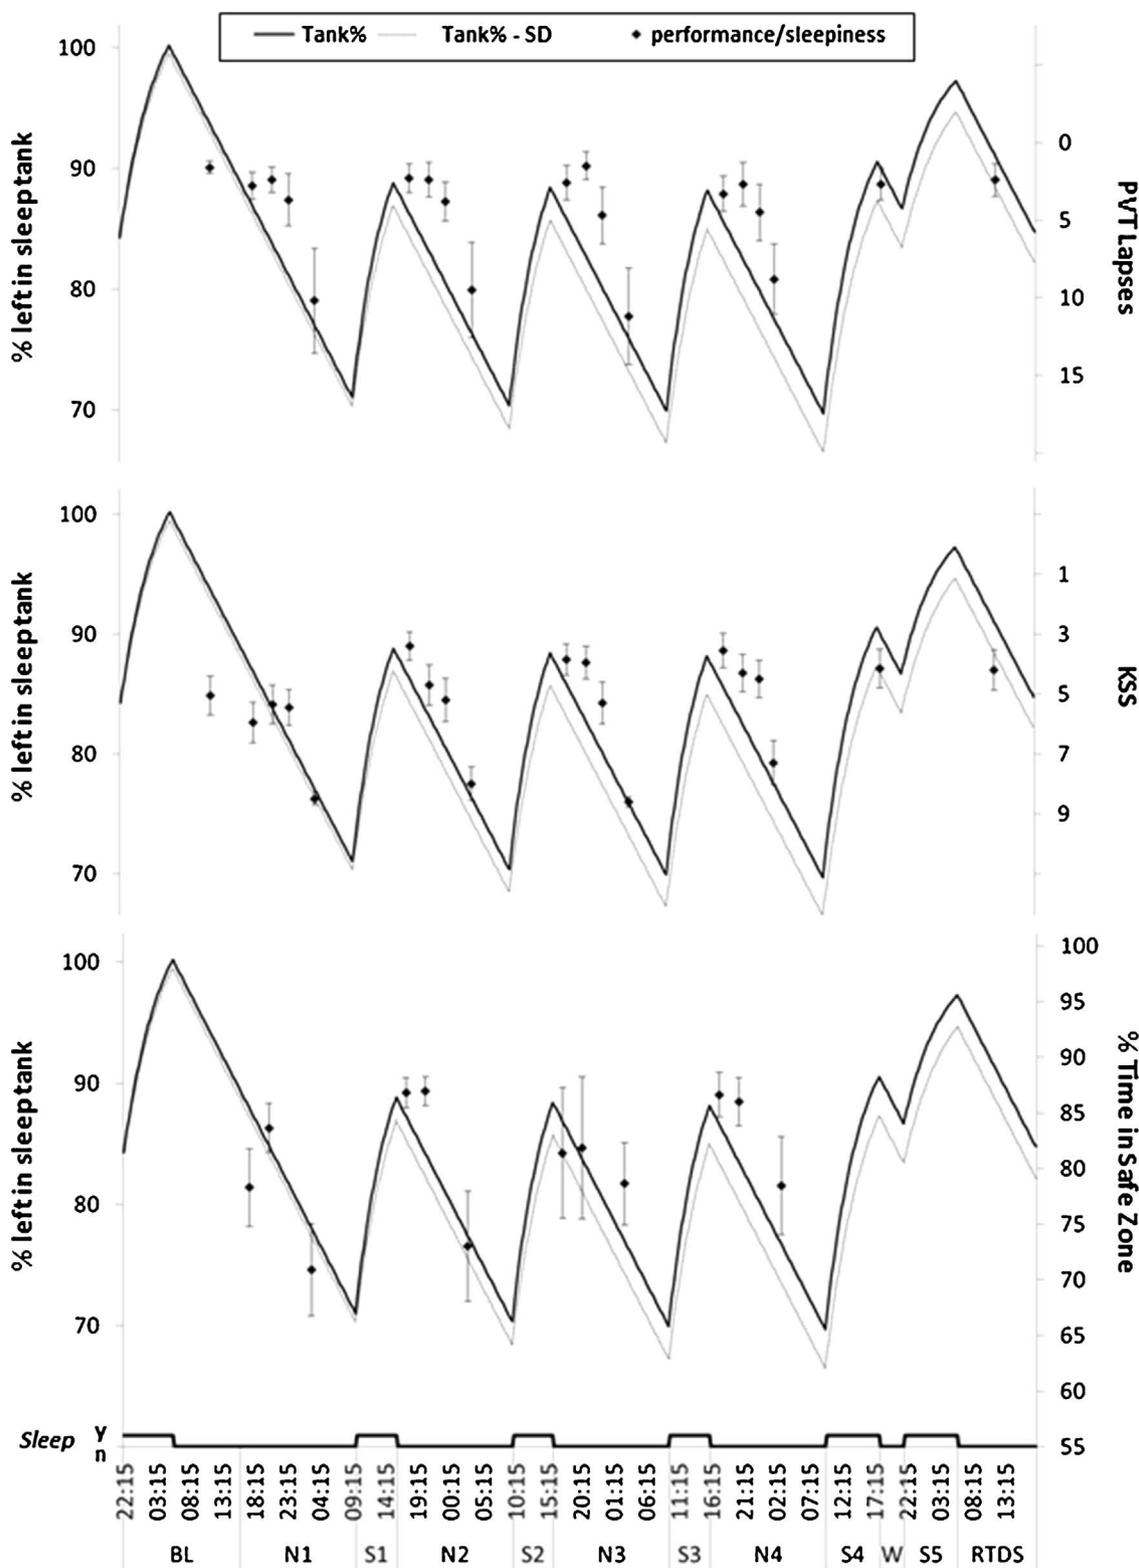


Fig. 3. “Sleep Tank”, Performance and Sleepiness – Time-of-day (24h clock) is on the x-axis, with % left in the sleep tank on the y-axis. Sleep opportunities are shown along the x-axis. BL = Baseline, N1-4 = nightshifts, S1-4 = Sleep opportunities, RTDS = return to daytime schedule. PVT Lapses (upper), KSS (middle) and %Time in the Safe Zone from the driving simulator (lower) are superimposed over model output. Note: In order to reflect impairment in performance and sleepiness measures in the same direction as Tank%, the y-axis for PVT Lapses and KSS have been reversed.

provide sleep inputs for the model in this study in order to initially test the model with gold-standard sleep measures.

The laboratory was sound-attenuated. Light levels were maintained at < 50 lx during wake periods and < 0.03 lx during sleep opportunities. Temperature was kept constant at 23 ± 1 °C. No access to time

cues was permitted throughout the protocol (i.e. clocks, mobile phones, television, internet). When not completing study tasks, participants were allowed to watch DVDs, play board games, or listen to music. Meals were controlled according to estimated energy requirement, calculated for each participant given the sedentary laboratory protocol

(Harris and Benedict, 1918). Participants were on one of two eating schedules (Grant et al., 2017). In one, participants had a meal during their simulated night shifts, and in the other, energy intake was redistributed to times outside of 1900 to 0700 h. Importantly, for all participants, 24 h energy consumption was kept constant. These differences in eating patterns are consistent with the workplace, where employees differentially distribute their food consumption around the clock (Banks et al., 2015). Since this was a proof of concept analysis in a small sample to investigate whether the model would track average performance and sleepiness across this schedule, eating groups were not looked at separately. In the workplace, such a model would need to be robust to differences in eating patterns. Future analyses with sufficient samples could specifically test whether the relationship between model and outputs is influenced by food consumption.

2.3. Psychomotor vigilance task (PVT)

The PVT was delivered via a hand-held response box. Participants were required to respond as quickly as possible to a stimulus in the form of a red millisecond counter by pressing a response button with the thumb of their dominant hand. When the button is pressed the millisecond counter stops, the number representing the response time in milliseconds. The stimulus was displayed at random intervals between 2 and 10 ms, across the 10-minute task duration. This task is sensitive to the effects of sleep loss and has a 1–3 trial learning curve (Dorrian et al., 2005). The variable for analysis in this manuscript was the average number of PVT lapses, defined as response times greater than 500 msec.

2.4. Karolinska sleepiness scale (KSS)

Sleepiness was measured using the KSS, which is a 9-point scale ranging from 1 = extremely alert to 9 = extremely sleepy-fighting sleep. This scale has been used extensively and has been validated against polysomnography and performance measures (Kaida et al., 2006).

2.5. Driving simulator

Driving performance was measured using the York highway driving simulator (York Computer Technologies, Kingston, ON). The simulator was run on a computer with a steering wheel and accelerator and brake pedals. The simulated drive was a two-lane country road with road markings, signs, and oncoming cars. Speed was displayed at the bottom of the screen and participants were instructed to follow the road rules including a maximum speed limit of 100 km/h. This simulator has demonstrated sensitivity in studies of sleep restriction (Arnedt et al., 2000), with minimal practice effects (De Valck et al., 2003). The variable for analysis was the percentage of time spent in safe zone, which was defined as within 10 km/h of the speed limit and within 0.8 m of the centre of the lane.

2.6. Polysomnography (PSG)

Sleep period time and efficiency were measured using PSG with standard electrode placements (C3/A2, C4/A1) during the baseline sleep, the 6 h daytime sleep opportunity on day 4, and during the RTDS sleep.

2.7. The “Sleep tank”

The “sleep tank” (SleepTank™) algorithm, analogous to the fuel tank in a car, is refilled by sleep, and depletes during wake. Required inputs are sleep period time and efficiency. Maximum tank size represents the sleep-fuel required to remain awake for four days. The model focuses on the homeostatic process of the two-process model. It does not include a circadian factor (i.e. it will have an estimable residual error due to this

rhythmic component). This “simplification” is deliberate to enable immediate and continuous feedback from basic sleep inputs.

2.8. Statistical analyses

In order to investigate changes in performance and sleepiness metrics across the simulated nightshift protocol. Mixed effects ANOVA was conducted, specifying dependent variables of PVT Lapses, KSS, and driving simulator %time in safe zone with fixed effects of shift (1–4), trial (PVT, KSS = 1830 h/ 2130 h /0000 h /0400 h; %safe zone = 1730 h/ 2030 h/ 0300 h) and shift* trial with a random effect of subjectID on the intercept (appropriately accounting for within and between subjects variance (Van Dongen et al., 2004)). In order to investigate the relationship between model predictions and performance and sleepiness metrics, mixed effects regression specified dependent variables of PVT Lapses, KSS, and driving simulator %time in safe zone with a fixed effect of the percentage left in the “sleep tank” (Tank%) with a random effect of subjectID on the intercept. In order to estimate an effect size for correlations between Tank% and performance and sleepiness metrics, time series correlations were conducted for each individual. Since distributions of r -values are skewed, they were transformed using Fisher’s r - z transformation, the average and standard error (sterr) across participants was calculated, and then values were converted back to r -values using the inverse Fisher function.

3. Results

Performance and sleepiness were significantly worse during the last test session of the shift compared to earlier trials, and sleepiness was significantly worse during the first shift compared to shifts 2–4 ($p < 0.01$, Table 1).

Average total sleep time during the baseline night was 7.11 h (SEM = 0.05 h), during daytime sleep opportunities was 5.51 h (SEM = 0.06), and during the return to daytime schedule night was 6.79 h (SEM = 0.05 h). Average sleep efficiency was 89.5% (SEM = 0.6), 92.4% (SEM = 1.1), and 84.9% (SEM = 0.7) for each of these sleep opportunities respectively. Fig. 2 illustrates the output of the SleepTank model for the suggested hours left to “get sleep” in the laboratory study protocol. Model outputs were calculated using sleep period timing and sleep efficiency (for BL, day sleeps and RTDS using polysomnographic recordings) for each participant. These were then compared to study metrics of performance and sleepiness. On waking at BL, there is > 20 h “in the tank,” with a latest advisable bedtime of 5:45 am. After waking from subsequent daytime sleep periods, the starting value “in the tank” is lower, with latest advisable bedtimes moving earlier in the shift across multiple nights.

Fig. 3 displays the subjective and performance measures overlaid on the percentage remaining in the tank (Tank%), which is highest on waking, with longer, more efficient sleep periods filling the tank to a greater level. Tank% was a significant predictor of PVT lapses ($\beta = -0.44$, sterr = 0.06, $t = -6.87$, $p < 0.001$), and KSS ($\beta = -0.20$, sterr = 0.03, $t = -7.68$, $p < 0.001$), such that every 5% reduction resulted in an increase of two lapses, or one point on the KSS. Tank% was also a significant predictor of %time in the Safe Zone ($\beta = 0.75$, sterr = 0.22, $t = 3.40$, $p = 0.001$), such that every 1% increase in the tank resulted in a 0.75% increase in time spent in the Safe Zone.

On average, time series correlations between Tank% and performance and sleepiness were moderate (PVT lapses $r_{Lag0} = -0.50$, sterr = 0.08, $R^2 = 0.25$; KSS $r_{Lag0} = -0.54$, sterr = 0.08, $R^2 = 0.30$; %Time in Safe Zone $r_{Lag0} = 0.45$, sterr = 0.17, $R^2 = 0.20$).

4. Discussion

Initial examination of the correspondence between model predictions and performance and sleepiness measures from a four-night

simulated nightshift protocol indicated relatively good predictive value, with percentage left in the “Sleep Tank” significantly predicting performance lapses, subjective sleepiness and safe driving during a 40-minute driving simulation. The model explained an average of 20–30% of the variance across participants. Performance and sleepiness were significantly worse during the trials closest to model-indicated latest advisable bedtimes. Not only did this simple model map onto the performance and sleepiness low points during the night shifts, but also onto the recovery points after the final daytime sleep and return to daytime schedule.

As expected, during the study, performance and sleepiness were significantly impaired towards the circadian low on each night shift (Dorrian et al., 2000; Lamond et al., 2001). Interestingly, there was no significant cumulative impairment across nights, which may be expected across multiple nightshifts (Folkard and Tucker, 2003). Sleepiness was worse on the first night in the series, which likely reflects the extended wakefulness that often accompanies transition to night shift (Tepas et al., 1981). The relative stability in performance, and improvement in sleepiness across consecutive nights is consistent with previous laboratory studies (Dorrian et al., 2003) and may reflect the ideal sleeping conditions in the laboratory, since sleep length and quality are likely to be lower in sleeping environments where light, temperature, and noise frequently cause sleep disturbance (Åkerstedt and Gillberg, 1981; Åkerstedt, 1991).

Indeed, this study was a first-step proof of concept in a controlled laboratory environment, with young, healthy males on basic performance tests. This clearly limits generalisability to the workplace where employees include females, as well as people who are older, and people who are experiencing health complaints, such as gastrointestinal and cardiovascular disease, which are higher amongst shiftworkers (Knutsson, 1989; Costa, 1997; Lowden, Moreno et al. 2010), and where countermeasure use (e.g. caffeine) is common. The controlled light exposure during the study is also different to the variable light exposure often experienced by nightshift workers, which often includes a bright pulse of morning light during the commute home (Eastman et al., 1994). This is a particularly important reason for trialling this work in the field, since the “sleep tank” model only picks up circadian changes implicitly via changes in sleep, and it is necessary to investigate how model predictions map onto performance in the more chaotic workplace environment.

Therefore, critical next steps include examining the model with different shift schedules in the laboratory and the field, and using polysomnographic sleep recording to estimate sleep period time and sleep efficiency (as in the current study) as well as actigraphic estimates of these measures. Results provide tentative evidence that this “sleep tank” model may be an informative tool to aid in individual decision-making based on sleep history. Field validation will allow us to be ready to pair the model with CSTs as they are validated against research-grade sleep measurement tools. Field validation will also be essential for determining predictive capacity of the model for individuals performing different tasks with different risk profiles. The model can be titrated to individual differences in sleep need by adjusting the tank threshold. Since in these initial analyses, our participants were young, healthy, average sleepers, further investigations will be needed across people with varying sleep patterns, and any benefits of individual titration quantified. As part of this, it will be useful to compare individual estimates from the “sleep tank” model with predictions from currently used biomathematical modelling software, to investigate whether similar predictive capacity can be achieved when individual sleep timing, length, and efficiency are being monitored and used as inputs.

Another vital consideration, as with any new workplace technology, is the way in which it may be perceived, understood, and used (or not) in the operational environment. In particular, consideration of the way in which the information is presented, and the potential for misinterpretation must be evaluated. For example, a metric such as “latest advisable bedtime” will need to be set and discussed in the context of

the risk profile of the task in the work environment. In the current study, we had a 3–4 h window between sleepiness and performance measurements. The assessments at 0300–0400 h indicated significant impairment relative to the earlier trials (i.e. the trials closest in time to the model-predicted latest advisable bedtime were the ones that showed significant performance impairment), which is encouraging. However, we do not have sufficient time sampling, nor a clear marker of when impairment becomes meaningful, in order to specifically examine the utility of the estimates of latest advisable bedtimes. This is also a necessary step in model validation if such metrics are to be provided to workers.

4.1. Summary

Increasingly, people are gaining access to information about their sleep. Using this information to make evidence-based decisions relating to fatigue safety is not always straightforward. Arithmetic transformation of sleep duration and quality into an intuitive “sleep tank” (SleepTank™), which includes suggestions such as the number of hours until more sleep is critical, may assist individual deliberation about fitness for work at that moment, and across a coming shift. Further validation is necessary, however initial findings are promising. Following validation of the model (and the devices) “sleep tank” calculations could be added to consumer-grade actigraphs and/or sleep monitoring apps to help people to map the performance and safety implications of their recent sleep history. Such a device could display time left in the tank (hours), the latest advisable sleep time and a sleep tank gauge, along with advice on how naps might refill the ‘tank’.

Acknowledgments

The authors would like to thank the research staff and students for their contributions. In particular; Stephanie Centofanti, Emily Watson, Cassie Hilditch, Alex Agostini, Alex Chatburn, Katja Morsky, Kenji Sison, students and volunteers. Thank you also to all the participants. Funding for this study was obtained through internal competitive university grant schemes. The PhD students (Crystal Grant, Maja Pajcin) working on this study were funded through the Australian Government Research Training Program scholarship.

References

- Åkerstedt, T., 1991. Sleepiness at work: effects of irregular work hours. In: Monk, T.H. (Ed.), *Sleep, Sleepiness and Performance*, pp. 131–152.
- Åkerstedt, T., 1995. Work hours, sleepiness and the underlying mechanism. *J. Sleep Res.* 4 (Suppl. 2), 15–22.
- Åkerstedt, T., 2003. Shift work and disturbed sleep/wakefulness. *Occup. Med.* 53 (2), 89–94.
- Åkerstedt, T., Gillberg, M., 1981. Sleep disturbances and shift work. In: Reinberg, A., Vieux, N., Andlauer, P. (Eds.), *Night and Shift Work: Biological and Social Aspects*. Pergamon Press, Oxford.
- Arnedt, J.T., Wilde, G.J., Munt, P.W., MacLean, A.W., 2000. Simulated driving performance following prolonged wakefulness and alcohol consumption: separate and combined contributions to impairment. *J. Sleep Res.* 9 (3), 233–241.
- Banks, S., Dorrian, J., Grant, C., Coates, A., 2015. Circadian misalignment and metabolic consequences: shiftwork and altered meal times. In: Watson, R. (Ed.), *Modulation of Sleep by Obesity, Diabetes, Age, and Diet*. Academic Press, pp. 155–164.
- Beck, A.T., Steer, R.A., Brown, G.K., 1996. Beck depression inventory-II. *San Antonio* 78 (2), 490–498.
- Belenky, G., Wesensten, N.J., Thorne, D.R., Thomas, M.L., Sing, H.C., Redmond, D.P., Russo, M.B., Balkin, T.J., 2003. Patterns of performance degradation and restoration during sleep restriction and subsequent recovery: A sleep dose-response study. *J. Sleep Res.* 12 (1), 1–12.
- Borbély, A.A., 1982. A two process model of sleep regulation. *Hum. Neurobiol.* 1 (3), 195–204.
- Buyse, D., Barzansky, B., Dinges, D., Hogan, E., Hunt, C., Owens, J., Rosekind, M., Rosen, R., Simon, F., Veasey, S., 2003. Sleep, fatigue, and medical training: setting an agenda for optimal learning and patient care. A report from the conference “Sleep, fatigue, and medical training: optimizing learning and the patient care environment”. *Sleep* 2, 218–225.
- Cabon, P., Deharvengt, S., Grau, J.Y., Maille, N., Berechet, I., Mollard, R., 2012. Research and guidelines for implementing fatigue risk management systems for the French regional airlines. *Accid. Anal. Prev.* 45 (Suppl), 41–44.

- Costa, G., 1997. The problem: shiftwork. *Chronobiol. Int.* 14 (2), 89–98.
- Dawson, D., McCulloch, K., 2005. Managing fatigue: it's about sleep. *Sleep Med. Rev.* 9 (5), 365–380.
- Dawson, D., Noy, Y.I., Härmä, M., Åkerstedt, T., Belenky, G., 2011. Modelling fatigue and the use of fatigue models in work settings. *Accid. Anal. Prev.* 43 (2), 549–564.
- De Valck, E., De Groot, E., Cluydts, R., 2003. Effects of slow-release caffeine and a nap on driving simulator performance after partial sleep deprivation. *Percept. Mot. Skills* 96 (1), 67–78.
- Dinges, D.F., 2004. Critical research issues in development of biomathematical models of fatigue and performance. *Aviat. Space Environ. Med.* 75 (Suppl. 1), A181–A191.
- Dorrian, J., Darwent, D., Dawson, D., Roach, G.D., 2012. Predicting pilot's sleep during layovers using their own behaviour or data from colleagues: implications for biomathematical models. *Accid. Anal. Prev.* 45 (Suppl), 17–21.
- Dorrian, J., Lamond, N., Dawson, D., 2000. The ability to self-monitor performance when fatigued. *J. Sleep Res.* 9 (2), 137–144.
- Dorrian, J., Lamond, N., Holmes, A.L., Burgess, H.J., Roach, G.D., Fletcher, A., Dawson, D., 2003. The ability to self-monitor performance during a week of simulated night shifts. *Sleep* 26 (7), 871–877.
- Dorrian, J., Roach, G.D., Fletcher, A., Dawson, D., 2007. Simulated train driving: fatigue, self-awareness and cognitive disengagement. *Appl. Ergon.* 38 (2), 155–166.
- Dorrian, J., Rogers, N.L., Dinges, D.F., 2005. Psychomotor Vigilance Performance: Neurocognitive Assay Sensitive to Sleep Loss. Marcel Dekker.
- Dorrian, J., Tolley, C., Lamond, N., van den Heuvel, C., Pincombe, J., Rogers, A.E., Drew, D., 2008. Sleep and errors in a group of Australian hospital nurses at work and during the commute. *Appl. Ergon.* 39 (5), 605–613.
- Eastman, C.I., Stewart, K.T., Mahoney, M.P., Liu, L., Fogg, L.F., 1994. Dark goggles and bright light improve circadian rhythm adaptation to night-shift work. *Sleep* 17 (6), 535–543.
- Folkard, S., Tucker, P., 2003. Shift work, safety and productivity. *Occup. Med. (Lond.)* 53 (2), 95–101.
- Gander, P., Hartley, L., Powell, D., Cabon, P., Hitchcock, E., Mills, A., Popkin, S., 2011. Fatigue risk management: organizational factors at the regulatory and industry/company level. *Accid. Anal. Prev.* 43 (2), 573–590.
- Gander, P.H., Mangie, J., Van Den Berg, M.J., Smith, A.A., Mulrine, H.M., Signal, T.L., 2014. Crew fatigue safety performance indicators for fatigue risk management systems. *Aviat. Space Environ. Med.* 85 (2), 139–147.
- Grant, C.L., Coates, A.M., Dorrian, J., Kennaway, D.J., Wittert, G.A., Heilbronn, L.K., Pajcin, M., Della Vedova, C., Gupta, C.C., Banks, S., 2017. Timing of food intake during simulated night shift impacts glucose metabolism: a controlled study. *Chronobiol. Int.* 34 (8), 1003–1013.
- Harris, J.A., Benedict, F.G., 1918. A biometric study of human basal metabolism. *Proc. Natl. Acad. Sci.* 4 (12), 370–373.
- Horne, J.A., Östberg, O., 1976. A self-assessment questionnaire to determine morningness-eveningness in human circadian rhythms. *Int. J. Chronobiol.* 4 (2), 97–110.
- Hursh, S.R., Redmond, D.P., Johnson, M.L., Thorne, D.R., Belenky, G., Balkin, T.J., Storm, W.F., Miller, J.C., Eddy, D.R., 2004. Fatigue models for applied research in war-fighting. *Aviat. Space Environ. Med.* 75 (3 Suppl), A44–A53 discussion A54–60.
- Kaida, K., Takahashi, M., Åkerstedt, T., Nakata, A., Otsuka, Y., Haratani, T., Fukasawa, K., 2006. Validation of the Karolinska sleepiness scale against performance and EEG variables. *Clin. Neurophysiol.* 117 (7), 1574–1581.
- Kandelaars, K.J., Fletcher, A., Dorrian, J., Baulk, S.D., Dawson, D., 2006. Predicting the timing and duration of sleep in an operational setting using social factors. *Chronobiol. Int.* 23 (6), 1265–1276.
- Knutsson, A., 1989. Shift work and coronary heart disease. *Scand. J. Soc. Med. Suppl.* 44, 1–36.
- Ko, P.-R.T., Kientz, J.A., Choe, E.K., Kay, M., Landis, C.A., Watson, N.F., 2015. Consumer sleep technologies: a review of the landscape. *J. Clin. Sleep Med. JCSM Off. Publ. Am. Acad. Sleep Med.* 11 (12), 1455.
- Lamond, N., Dorrian, J., Roach, G.D., Burgess, H.J., Holmes, A.L., McCulloch, K., Fletcher, A., Dawson, D., 2001. Performance, sleep and circadian phase during a week of simulated night work. *J. Hum. Ergol. (Tokyo)* 30 (1-2), 137–142.
- Lowden, A., Moreno, C., Holmback, U., Lennernas, M., Tucker, P., 2010. Eating and shift work - effects on habits, metabolism and performance. *Scand. J. Work. Environ. Health* 36 (2), 150–162.
- Mallis, M.M., Banks, S., Dorrian, J., Dinges, D.F., 2017. Human factors in aviation. In: Salas, E. (Ed.), *Human Factors in Aviation*. Elsevier, USA.
- Mallis, M.M., Mejdal, S., Nguyen, T.T., Dinges, D.F., 2004. Summary of the key features of seven biomathematical models of human fatigue and performance. *Aviat. Space Environ. Med.* 75 (3), A4–A14.
- Rajaratnam, S.M., Arendt, J., 2001. Health in a 24-h society. *Lancet* 358 (9286), 999–1005.
- Rogers, A.E., Hwang, W.T., Scott, L.D., Aiken, L.H., Dinges, D.F., 2004. The working hours of hospital staff nurses and patient safety. *Health Aff. (Millwood)* 23 (4), 202–212.
- SA Ambulance, 2008. **Fatigue Score Calculator**. Retrieved 23-07, 2017, from: <http://www.saambulancestaff.com.au/FatigueCalculator/>.
- SafeWorkAustralia, 2011. **Model Bill 23/6/2011**. **SafeWork Australia: Model Work Health and Safety Act Revised Draft 23 June 2011**. Retrieved Jan 12, 2015, from: <http://www.safeworkaustralia.gov.au/sites/swa/about/publications/pages/model-work-health-safety-act-23-june-2011>.
- Tepas, D.I., Walsh, J., Armstrong, D., 1981. Comprehensive study of the sleep of shiftworkers. In: Johnson, L.C., Tepas, D.I., Colquhoun, W.P., Colligan, M.J. (Eds.), *Biological Rhythms, Sleep and Shiftwork: Advances in Sleep Research*. MTP Press, Lancaster.
- TransportCanada, 2011. **Fatigue Risk Management - Module 2. Fatigue Risk Management for Employees**. Transport Canada, Canada.
- Van Dongen, H., Dinges, D.F., 2005. Circadian rhythms in sleepiness, alertness, and performance. *Principles Practice Sleep. Med.* 4, 435–443.
- Van Dongen, H.P., Maislin, G., Mullington, J.M., Dinges, D.F., 2003. The cumulative cost of additional wakefulness: dose-response effects on neurobehavioral functions and sleep physiology from chronic sleep restriction and total sleep deprivation. *Sleep* 26 (2), 117–126.
- Van Dongen, H.P., Mott, C.G., Huang, J.-K., Mollicone, D.J., McKenzie, F.D., Dinges, D.F., 2007. Optimization of biomathematical model predictions for cognitive performance impairment in individuals: accounting for unknown traits and uncertain states in homeostatic and circadian processes. *Sleep* 30 (9), 1129–1143.
- Van Dongen, H.P., Olofsen, E., Dinges, D.F., Maislin, G., 2004. Mixed-model regression analysis and dealing with interindividual differences. *Methods Enzymol.* 384, 139–171.